



Protects connections against water condense

Good processability in low temperatures

Ideal for coax cable sleeve repair

Cold processable

Very durable

High stretchability


Easy to use, no tools needed

Welds an air- and watertight protection

Usable as connector vibration protection

Specifications

Material	Butyl
Color	Black
Length	10 M roll
Thickness	1,5 mm
Tape width	30 mm
Max. pulling force	>10 N/cm
Max. stretch	>200%
Operating temperature	-10 to +50 C

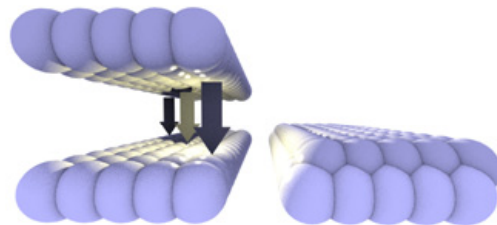


The self vulcanizing process automatically begins when the two sides of the tape are put into contact. A catalyst on one side of the tape begins the bonding process as soon as wrapping takes place.

Easy installation



Step 1:
Peel off the protective layer

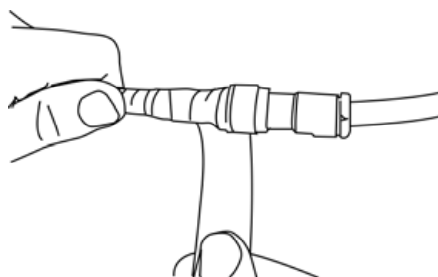

Step 2:
Stretch tape and apply half-lapped to form void-free joint. Degree of stretch is not critical and may vary in different sections of joint to accomplish void-free application



Step 3
Protect the joint with two half-lapped layers of SVT10 Self Vulcanizing Tape.

