



# 5 pcs Connector Protector



Adheres to all Coax hardware and Coax Cable jackets

Protects connections against water condense

Stays flexible at any temperature

Easy to use, no tools needed

Hand moldable plastic

Provides years of protection

Easy to disconnect and remove


Package contains 5 connection protectors

Forms and seals over odd shaped and difficult Coax fittings

## Specifications


Material	Moldable plastic
Color	Black
Length	5x 25 cm
Thickness	5x 1,5 mm
Tape width	5 x 2 mm
Viscosity	ASTM D5-52, gm load, 5 sec.=7.0/10.0 mm.
Max. stretch	Non-staining to paint, non-toxic and non-corrosive. Material stays flexible and maintains seal over extreme range of temperatures. Will not crack at -128°C. Will not slump -1 hr. @175°C.
Temperature range	Apply between 10°C. to 35°C.

## Easy installation

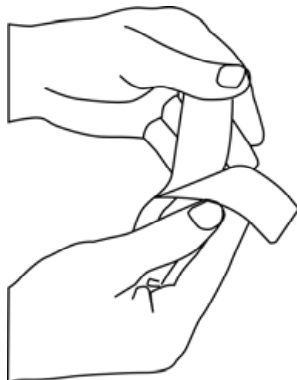

### PEEL

Peel off the protective layer

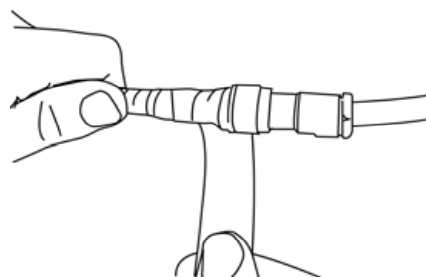

### WRAP

Stretch tape and apply half-lapped to form void-free joint. Degree of stretch is not critical and may vary in different sections of joint to accomplish void-free application



### SEAL

The seal is slightly sticky and should be moulded now by hand to remove any gaps and to ensure that all the wraps are blending together.

